

# Installation Guidelines

## FOR REVIVE WOOD CLAD AND HYBRID POCKET REPLACEMENT WINDOWS

### Installer

- Read instructions completely before attempting installation. Failure to follow these guidelines will forfeit the Windsor warranty coverage, written or implied.
- Always provide a copy of these instructions to the homeowner.
- These instructions are consistent with ASTM 2112 "Standard Practice for Installation of Exterior Windows, Doors and Skylights" into common wall constructions. Contact your architect or construction professional for installation into other building designs or construction methods.
- Regional codes and environmental conditions may require installation that is different from these guidelines. It is your responsibility to ensure that local codes and ordinances are followed.

### Warning

- ⚠ **Work Safe!** Always wear proper eye and hearing protection when installing or adjusting Windsor products.
- ⚠ **Use Power Tools Properly!** To avoid personal injury, always follow manufacturers' instructions for safe operation of power tools.
- ⚠ **Ladder Safety!** Working at elevated levels can be hazardous. Always use ladders and scaffolding properly. Consult manufacturers' guidelines for safe use of these types of equipment.

### Handling and Storage

- Always carry door units upright. Do not carry flat! Doing so could result in damage to the unit.
- Do not store units outside.

### LEAD PAINT AND EXISTING WINDOW DISPOSAL:

- A) Before any remodel or renovation, make sure to identify any potential lead paint issues and take necessary steps to reduce the risk of lead contamination.
- B) The U.S. Environmental Protection Agency (EPA) has issued a "Lead Renovation, Repair and Painting Rule (RRP)" for remodelers of older homes and buildings. This rule requires training and certification in lead-safe work practices for firms performing renovation, repair or painting on homes and child-occupied facilities built prior to 1978.
- C) For more information regarding procedures for dealing with lead paint, please visit EPA's website at [www.epa.gov/lead](http://www.epa.gov/lead).
- D) When removing existing windows, make sure to wear appropriate personal protective equipment. Extra precautions should be taken to protect others and property within the vicinity and below the removal window and surrounding components.
- E) Consult with local waste authorities on the proper recycling or disposal of old window components.




**WINDSOR**  
WINDOWS & DOORS  
A Woodgrain Millwork Company

[www.windsorwindows.com](http://www.windsorwindows.com)

### Parts Included

- Replacement Window
- Frame Expander – Optional (Side and head)
- Installation Screws
- Interior Wood Sash Cover (DH picture window only)
- Side Stops with Insertion Barbs (Casement only)



### Materials Needed

- 100% Silicone
- Exterior Grade Sealant
- Backer Rod – 1/4"-1/2" diameter closed cell foam
- Low-Expansion Foam
- Shims – Made of cedar or synthetic material

**ATTENTION! This document contains an arbitration agreement and jury-trial and class-action waivers that affect your legal rights.** By purchasing, installing or using this product without opting out as provided below, you agree to arbitrate any dispute you may have with Windsor relating to your Windsor products and to waive your rights to a jury trial and to participate in class-action or class-arbitration proceedings relating to any such disputes. **YOU CAN OPT OUT OF THIS ARBITRATION AGREEMENT AND THESE WAIVERS AS SET FORTH BELOW.**

### Tools Needed

- Safety Glasses
- Tape Measure
- Level
- Putty Knife
- Mallet



- Screwdriver (Phillips and Flat Head)
- Power Drill
- Reciprocating Saw
- Silicone Application



## Step 1: Inspect Replacement Window

- A) Unwrap replacement window.
- B) Verify window specification (product, size, color, grille pattern, etc.).
- C) Visually inspect window for physical or cosmetic damages.
- D) Verify included parts (listed to the left). **Note: Contact dealer or distributor for recommendations before installing if any part of the list is concerning.**

## Step 2: Interior/Exterior Installation Preparation

**IMPORTANT:** Prior to beginning installation – verify the dimensions of the existing frame.

- A) Measure the opening width of the existing frame at the top, middle and bottom of the frame. (Fig. 1 & 2) Verify the replacement window frame width is approximately 1/2" smaller than the existing frame width.

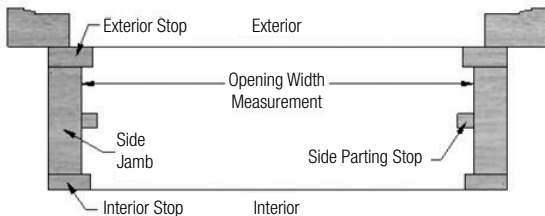


FIG. 1




FIG. 2

- B) Measure the opening height of the existing frame at the left, right and center of the frame. (Fig. 3 & 4) Verify the replacement window frame height is approximately 3/8" smaller than the existing frame height. **Note: Measure from inside of head jamb to top of sill. (Fig. 3 & 4)**

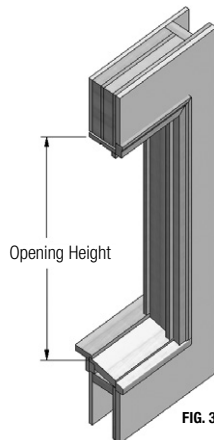


FIG. 3

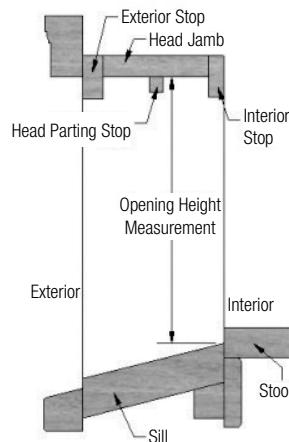


FIG. 4

## Step 2A: Interior Install Preparation

- A) If required, remove interior trim. If you plan to reuse interior trim, remove with caution. (Fig. 5)
- B) Remove interior stops from frame. If you plan to reuse interior stops, remove with caution. (Fig. 6)
- C) Remove existing sash from frame. (Fig. 7)
- D) Remove existing balance system (cut cords if necessary, detach pulleys). (Fig. 8)
- E) If applicable, remove parting stops from head and side jambs. (Fig. 9)
- F) Clean corners inside frame and along sill.
- G) Apply silicone to sill joints along side jamb and sill stop. (Fig. 10)
- H) Apply silicone to interior joints of the exterior stops along both side jambs and head jamb. (Fig. 11)

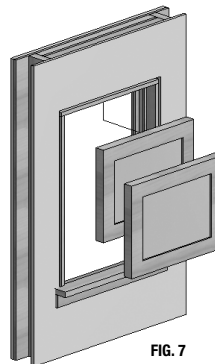


FIG. 7

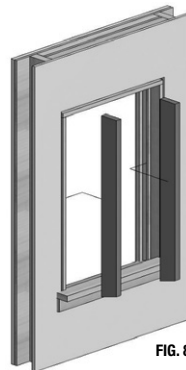


FIG. 8

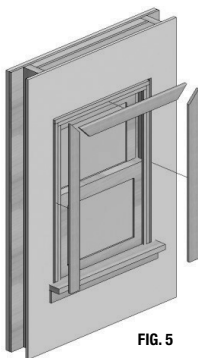


FIG. 5

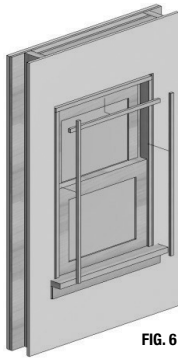


FIG. 6

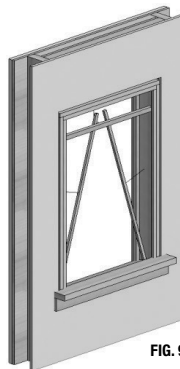


FIG. 9

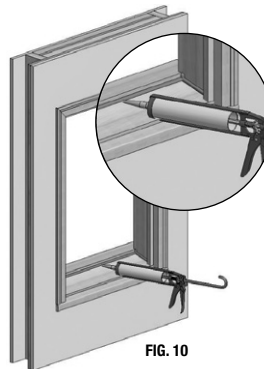


FIG. 10

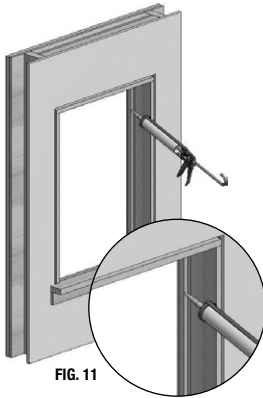


FIG. 11

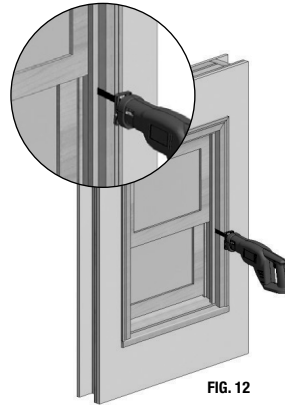


FIG. 12




FIG. 13

## Step 2B: Exterior Install Preparation

- A) Remove exterior stops from head and side jambs of frame.  
A reciprocating saw may be necessary for removal. (Fig. 12 & 13)
- B) Remove existing sash from frame. (Fig. 14)
- C) Remove existing balance system (cut cords if necessary, detach pulleys). (Fig. 15)
- D) If applicable, remove parting stops from head and side jambs. (Fig.16)
- E) Clean corners inside frame and along sill.
- F) Apply silicone to the joints along the sill, side jamb and side sill stops. (Fig. 17)

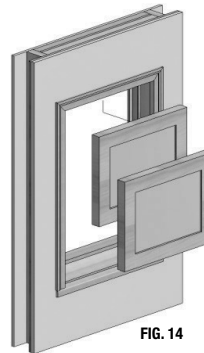


FIG. 14




FIG. 15



FIG. 16

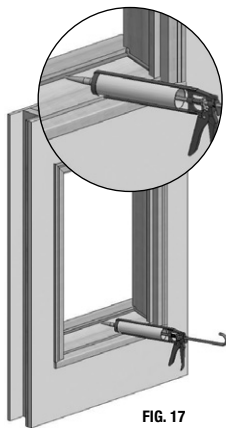


FIG. 17



FIG. 18

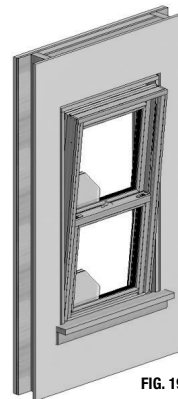


FIG. 19

## Step 3: Install Window

**IMPORTANT:** Installation of replacement window should be completed by two or more people.

### Step 3A: Interior Install

- A) Tilt top of replacement window toward interior as shown. (Fig. 18 & 19)
  - Insert bottom of replacement window into existing frame so exterior side of replacement jamb is pressed up against current exterior stops.
  - Insert the top of replacement window.
- B) Appropriately shim the window to obtain a level and square window with uniform frame dimensions. (Fig. 20) **Note: Place a shim behind each installation screw hole and at the center on each side.**


- C) Apply installation screws. (Fig. 21)

#### Double hung:


- Apply each upper side screw within the interior balance channel. **Note: Ensure screw heads are flush with face of jambliner shell.**
- Raise the lower sash a minimum of six inches.
- Apply each lower side screw within the interior balance channel. **Note: Ensure screw heads are flush with face of jambliner shell.**

#### Casement:


- Apply four screws into the pre-drilled holes in the side jamb. **Note: Ensure screw heads are flush with face of the side jamb.**
  - Apply wood side stops onto side jambs by pressing the plastic barb into the grooves in the side jamb. Lightly tap with a mallet until the stop is tight against the side jamb.
- D) Spray low-expansion foam on both sides and head of window in between existing and replacement windows. (Fig. 22) **Note: Do not apply low-expansion foam to sill.**

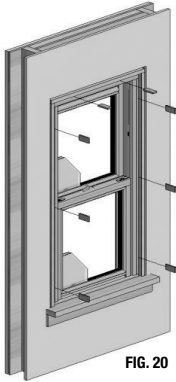

**FIG. 20**




**FIG. 21**

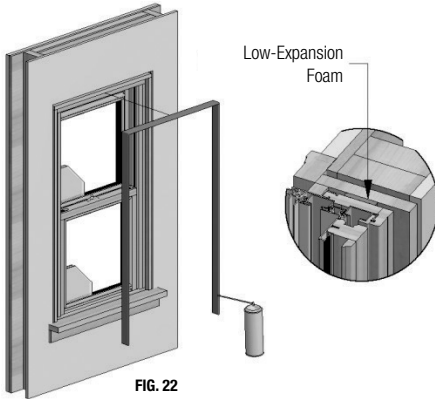


**FIG. 22**


- E) Once the foam is cured, re-apply interior stops. (Fig. 23)
- F) Re-apply interior trim. (Fig. 24)
- G) Apply exterior grade sealant along the head and sides of the replacement window; sealing the gap between the existing exterior stop and replacement frame. (Fig. 25)
- H) Using a table saw, rip down the frame expanders to the appropriate width leaving approximately 0" - 1/32" gap between the frame expander and the existing brickmould.

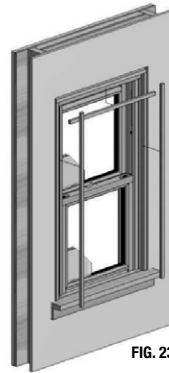


**FIG. 23**

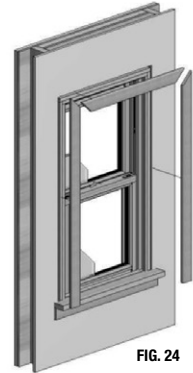


**FIG. 24**

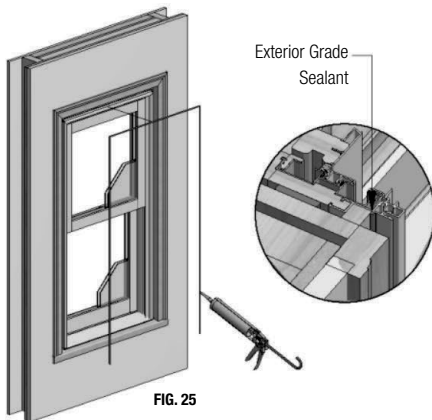


- I) Cut frame expander to the appropriate size. **Note: Make sure to apply frame expanders as shown in the diagram below.** (Fig. 26)



- J) Using a mallet, apply frame expander to all four sides of the window. (Fig. 27)

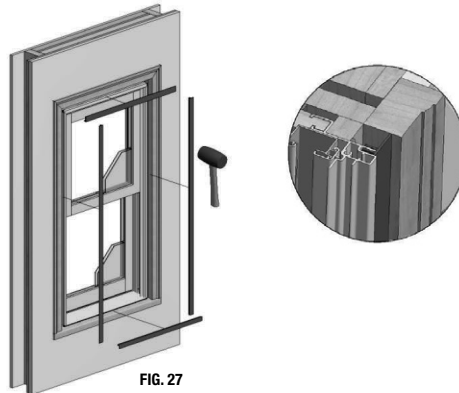

- K) Using an exterior grade sealant, apply approximately 3/16" bead of silicone between the frame expander and the brickmould for both sides and head of window. **Note: Do not apply sealant to sill.** (Fig. 28)

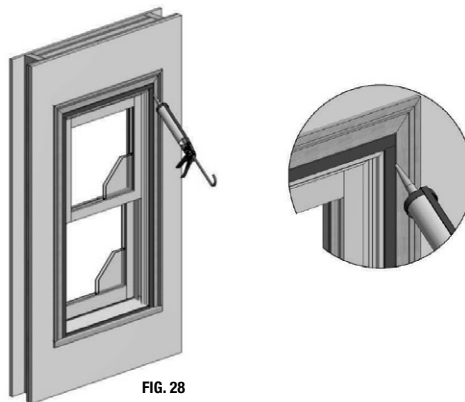



## Step 3B: Exterior Install

- A) Tilt top of replacement window towards interior as shown below. (Fig. 29)
- Insert replacement window into existing frame so top of window presses against the interior head stop.
  - Insert bottom of replacement window into frame until replacement interior stops are pressed against current interior stops.

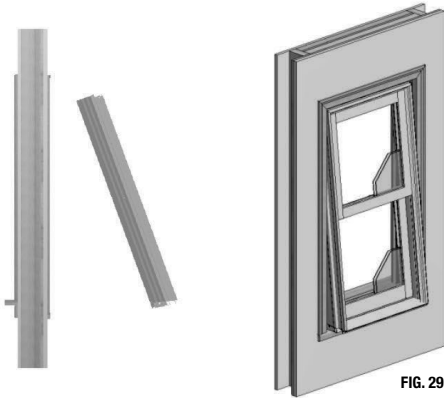


FIG. 29

- B) Appropriately shim the window to obtain a level and square window with uniform frame dimensions. **Note: Place a shim behind each installation screw hole and at the center on each side.** (Fig. 30)
- C) Apply Installation Screws. (Fig. 31)
- Apply each upper side screw within the interior balance channel. **Note: Ensure screw heads are flush with face of Jambliner shell.**
  - Raise the lower sash a minimum of six inches.
  - Apply each lower side screw within the interior balance channel. **Note: Ensure screw heads are flush with face of Jambliner shell.**

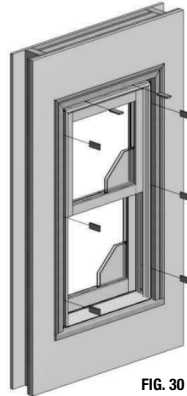


FIG. 30


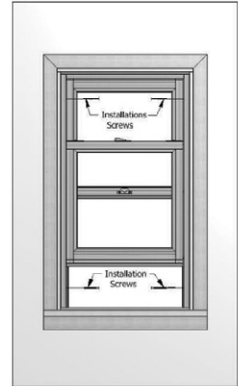




FIG. 31

### Step 3B: Exterior Install *(continued)*

- D) From the exterior, spray low-expansion foam to both sides and head of window in between existing and replacement windows. (Fig. 33 & 34)  
**Note: Do not apply low-expansion foam to sill.**
- E) After low-expansion foam has cured, apply backer rod to both sides and head of window between the replacement and existing frame. (Fig. 33 & 34)
- F) Apply exterior grade sealant to both sides and head of window between the replacement and existing frame. (Fig. 33 & 34) **Note: Do not apply sealant to sill.**
- G) Using a table saw, rip down the frame expanders to the appropriate width leaving approximately 0"-1/32" gap between the frame expander and the existing brickmould.

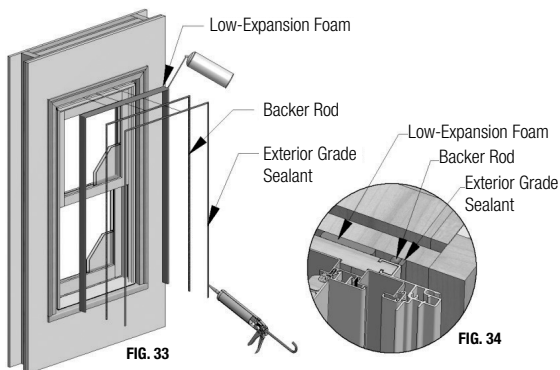

- H) Cut frame expander to the appropriate size. (Fig. 35) **Note: Make sure to apply frame expanders as shown in the diagram below.**
- I) Using a mallet, apply frame expander to all four sides of the window. (Fig. 36)
- J) Using an exterior grade sealant, apply approximately 3/16" bead of silicone between the frame expander and the brickmould for both sides and head of window. (Fig. 37) **Note: Do not apply sealant to sill.**

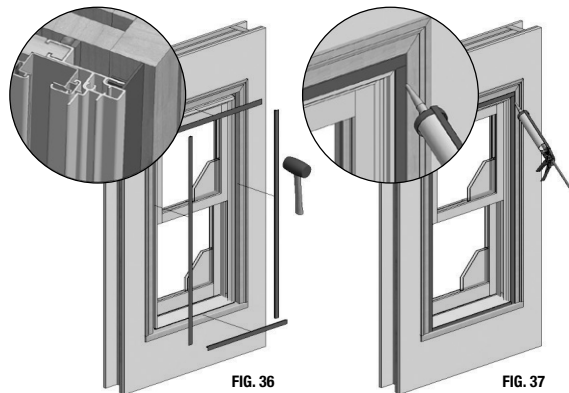

## Step 4: Completing the Installation

- A) Remove all labels or shipping materials.
- B) Operate window to ensure proper operation. The sash will not operate correctly if the window frame is out of square, over-shimmed or over-insulated.
- C) Properly finish all interior wood components within 60 days of installation. See the Care and Use Guide at [www.windsorwindows.com](http://www.windsorwindows.com) for further details on finishing wood windows.
- D) **IMPORTANT:** Do not stain or paint any hardware or vinyl components.

If you have questions regarding the installation or adjustment of your Windsor products, please contact Windsor Windows & Doors directly at 1-800-218-6186. You may also complete and submit the form on the Contact page of our website ([www.windsorwindows.com/contact-us](http://www.windsorwindows.com/contact-us)) and one of our window specialists will promptly answer your question. On our website, you will also find Care and Use Guides to assist you in preserving your windows and patio doors.

### Care and Use

An inspection of your windows should be made annually. Visit the Windsor website ([www.windsorwindows.com](http://www.windsorwindows.com)) or contact your local independent Windsor distributor for information on the care and use of your product. Ask for the Care and Use Guide, which contains information on finishing, cleaning, what to look for during yearly inspections, general maintenance tips, sash/panel adjustment, sash/panel removal, screen removal and information on condensation.

## REVIVE – Limited Warranty

Windsor Windows & Doors, as manufacturer, warrants from the date of manufacture that all Revive pocket replacement windows will be free from defects in materials and workmanship that significantly impair their operation and proper usage, subject to conditions and limitations within. This warranty is transferable to subsequent structure owners, up to the time limits of the warranty. To achieve optimum performance from your Windsor products, and to preserve the warranty, please refer to the Windsor Care and Use Guide on our website, [www.windsorwindows.com](http://www.windsorwindows.com).

Windsor would like to thank you for selecting our Revive replacement windows. We are confident that they will provide you with comfort, aesthetics and value for many years to come. As with any product warranty, there are certain limitations and disclaimers that must be included so that all parties are assured that the product is being installed and used properly. Our intent is to make this warranty as clear and user-friendly as possible.

Revive Wood Clad and Hybrid replacement windows carry a **“Limited Warranty,”** which provides coverage against insulated glass seal failures for 20 years, cellular PVC components for 25 years, and coverage for workmanship and materials for 10 years. In addition, we are now introducing optional extended-life exterior aluminum surface finishes that extend the warranty on such finishes to a period of 30 years (see #2 for details).

Revive Vinyl replacement windows carry a **“Lifetime Limited Warranty,”** which provides coverage against workmanship and materials to the original owner-occupant, for as long as they occupy their single-family residence. If either the residence is sold, or these products are installed in a “non single-family structure,” then all warranties noted are limited to 10 years from the original date of manufacture, and by exclusionary items and conditions as noted.

There are eight primary components to Revive replacement windows, and the assurances and warranty provisions are specific to each:

**1. Insulated glass used in Revive Wood Clad and Hybrid replacement windows: 20 years**

— Windsor warrants that, from the date of manufacture, and under normal conditions, the insulated glass will not develop any material visual obstructions as a result of premature failure of the insulated glass seal. If a failure of seal occurs, Windsor will provide replacement insulated glass only, for 20 years free of charge. **Insulated glass used in Revive Vinyl replacement windows** — Windsor warrants that, from the date of manufacture, and under normal conditions, the insulated glass will not develop any material visual obstructions as a result of premature failure of the insulated glass seal. If a failure of seal occurs, Windsor will provide replacement insulated glass only, for the first 10 years free of charge. To the original owner-occupant in a single-family residence, Windsor extends the insulated glass warranty coverage for as long as they remain owner-occupant in a single-family residence, to provide replacement insulated glass at the cost of 50 percent of the current list price for that insulated glass, at the time the claim is submitted. Replacement glass will be shipped F.O.B. factory. *NOTE: There is no coverage for any associated costs, such as installation, disposal or refinishing.*

**2. Exterior aluminum surface finishes**

**AAMA 2604:** Standard finish — 20-year warranty\*

**AAMA 2605:** Optional upgrade — 30-year warranty\*

**Anodized:** Optional upgrade — 5-year warranty, no warranty for coastal applications\*

- Warranty: Windsor warrants that exterior aluminum surface finishes, when exposed to normal atmospheric conditions, will not peel, check, crack, blister, flake or lose adhesion. This warranty begins on the date of manufacture. Please be aware that exterior aluminum surface finishes will weather and fade over time in any environment. Weathering, chalking and fade will vary depending on conditions, such as exposure to heavy salt spray environments, airborne pollution, elevation, orientation, altitude and other atmospheric conditions. To prolong the life and appearance of the finish coating, it is required that exterior cladding be cleaned and maintained according to a scheduled maintenance program. If paint failure should occur, Windsor reserves the right to determine the best method for corrective action.

- See Windsor's website, [www.windsorwindows.com](http://www.windsorwindows.com), for cleaning and maintenance instructions; also refer to AAMA 610.1-79. Windsor's website has additional information about each of the available finishes.

\*Coastal applications: Applies where units are installed within one mile of the coast. For all finishes except anodized, warranty period is limited to 10 years for these applications.

- 3. Cellular PVC components: 25 years** — Cellular PVC components are warranted to not rot, warp, blister, corrode or flake under normal conditions for 25 years from date of manufacture. If any repair or replacement is necessary, such repair or replacement is warranted for the remainder of the warranty period.

- 4. Revive Vinyl material** — Windsor warrants that vinyl material will not blister, corrode, flake, chip, peel or rot under normal conditions, so as to substantially impair the operation or performance of the Revive Vinyl replacement window. If any of the vinyl material in our Revive Vinyl replacement windows should blister, corrode, flake, chip, peel or rot under normal conditions, or in the event the vinyl material fails, Windsor will provide a free Revive Vinyl replacement product or affected part.

- 5. All other parts and components: 10 years (including, but not limited to, such items as weatherstrip and hardware)** — Window hardware components are usually manufactured by others and purchased by Windsor for use in our products. Windsor warrants its Revive hardware components, under normal conditions, against premature component failure that substantially impairs the operation or performance of the part or component. In the event of such a failure, Windsor will provide no-charge replacement parts for 10 years from date of manufacture of the Revive window. Since Windsor purchases many of these parts and components from others, Windsor cannot guarantee that the exact model or design will be available in the future, and usually, the current model will be provided. *NOTE: There is no coverage for any associated costs, such as installation, disposal or refinishing.*

**6. Window Sash Opening Limiting Devices**

- Always refer to applicable building codes when considering the purchase, installation and application for use as a Window Opening Control Device (WOCD). Also, refer to ASTM F2090-10 for additional information.
- If Window Sash Opening Limiting Devices are going to be installed, carefully follow all information provided with the Window Sash Opening Limiting Devices, including installation, operation and safety information.

Failure to properly maintain any and all finishes, interior or exterior, including finishes applied to components made from CPVC, wood, vinyl or aluminum. (See Windsor's Care and Use Guide at [www.windsorwindows.com](http://www.windsorwindows.com).)

- Damage caused by acts of God or some other cause outside Windsor's control.

**WARNING: PAINTING of cellular PVC or any PVC surfaces with a paint not specifically formulated for PVC materials will forfeit the product warranty.**

**WARNING: PAINTING of cellular PVC or any PVC surfaces with a color darker than L-56 (on the scale where 0=black and 100=white), even with a paint specifically formulated for PVC, will forfeit the product warranty.**

- Conditions that exceed the design parameters of the windows.
- Improper removal of any permanent warning or identification labels from the product or products.
- Installation in a non-vertical or sloped application.
- Damage from accident, misuse or abuse.
- Alteration, modification or use for a purpose other than that for which it was intended or designed. (Including, but not limited to, paint applied to vinyl and damage resulting from security systems applied or attached to our product.)
- Application of any tint, UV limiting or sun blocking film to either interior or exterior surfaces of the glass, or the use of film shades.
- Use in or around ships, boats, trailers, campers, swimming pools, hot tubs, spas, saunas or greenhouses.
- Installation exceeding 5,000 feet above sea level, unless high altitude breather tubes have been factory installed.
- Exposure to harmful chemicals.
- Mulling (connecting or attaching) Revive product(s) to those of another manufacturer.
- Failure to follow Windsor's Care and Use recommendations. (See Windsor's Care and Use Guide at [www.windsorwindows.com](http://www.windsorwindows.com).)
- Failure to maintain any factory finish. (See Windsor's Care and Use Guide at [www.windsorwindows.com](http://www.windsorwindows.com).)

- Failure to use paint ordered from Windsor to touch-up or reapply to vinyl windows with factory-applied paint.
- Failure to comply with the claims procedure outlined herein.

**Exclusions – The following items or conditions are specifically excluded from the remedies provided by this warranty:**

1. Remedies requested for any labor for removal, repair or replacement of defective parts, products or glass, or any repainting or refinishing costs, except as noted above.
2. Remedies requested for any consequential, incidental or punitive damages.
3. Remedies requested for damage caused by or adjustment required from:
  - a. Improper handling, installation or maintenance and/or delivery by others.
  - b. Exposure to conditions beyond performance specifications and/or design limitations.
  - c. Water infiltration other than as a result of a manufacturing defect.
  - d. Condensation and damage caused by the failure to resolve condensation.
  - e. Damage to glass, metal, cellular PVC, PVC or any other surfaces caused by brick wash, sanding, improper cleaning/washing, chemicals or airborne pollutants.
  - f. Minor scratches, and/or minor glass imperfections that do not impede or severely obstruct normal viewing area, and do not impact the structural integrity of the insulated glass.
  - g. Reflective distortion of any kind, including, but not limited to, color, tint, hue or waves inherent to annealed, coated, laminated and tempered glass.
  - h. Heat gain, vinyl distortion or damage of any kind, including, but not limited to, effects due to the reflective properties of glass and its finishes.
  - i. Alignment/location of inner grids of less than or equal to 1/8" from specified location.
  - j. Stresses to product caused by building defects, movement of the building in which the windows are installed, and/or components of that building, including building settlement.

- k. Catastrophic weather or acts of God, including fire, wind or wind-blown objects.
  - l. Normal weathering, wear and tear.
4. Any applicable taxes and freight. (Replacement parts will be shipped to the closest Windsor distributor at Windsor's expense, or the option to ship directly to the homeowner at the homeowner's expense.)
  5. Remedies requested for glass breakage, including stress cracks, unless Windsor determines that the breakage or cracking is the result of a manufacturing defect.
  6. Remedies requested for special glazing.
  7. Laminated glass will have a warranty limited to five years against delaminating of inner liner (PVB) and extensive visual obstruction due to glass seal failure.
  8. Windsor does not warrant the percentage of inert gas present in high-performance products. Gas dissipates over time at different rates depending upon use and conditions.
  9. Remedies requested for rattling of, or noise caused by, inner grids due to, but not limited to, the lack of uniform supported structure of product, in which the operation of the product, or of another product, causes vibration harmonics into the Windsor product and induces inner grids to vibrate against the interior of the insulated glass, creating a noise.
  10. Remedies requested for brass and oil rubbed bronze hardware finishes for finish loss, tarnishing or wear.
  11. Remedies requested for corrosion, tarnishing or operation of standard hardware in high salt spray environments.
  12. Remedies requested for anodized aluminum exterior finish variances in appearance of color, dielines, pitting and chalking are not warranted.
  13. Remedies requested for painted interior finish failures related to, but not limited to, knots, finger joints, stile and rail separation, joint separation of components, failures resulting from cracking/splitting/raised grain of the substrate, improper installation, lack of maintenance, moisture penetration, condensation or improper cleaning.
  14. Remedies requested for fading or chalking of exterior aluminum surface finishes are warranted only when chalking exceeds number (8) chalk rating using ASTM 4214-98, and fading or color change is greater than 5 delta E in accordance with ASTM D-2244-02.
  15. Remedies requested for wood texture, color variations and other wood characteristics within Windsor's specifications.
  16. Remedies requested for natural warping of wood components unless the "warp" exceeds 1/4"; warping includes bowing, cupping and twisting.
  17. Remedies for any special or custom product or item that is manufactured according to specification provided by the customer.
  18. Remedies requested for any product in a size that is greater than that shown in our catalog; these products are purchased "as is" without any warranty.
  19. Remedies requested for any product purchased without factory installed glazing; these products are purchased "as is" without any warranty.
  20. Remedies requested for any product installed in structures that do not allow for proper management/drainage of moisture, including, but not limited to, exterior insulation and finishing systems (EIFS) or "synthetic stucco" without engineered drainage system.
  21. Remedies requested for products manufactured by others.

**Limits of Liability – Where lawful, this warranty is in lieu of all other warranties, expressed or implied, including any implied warranties of merchantability or fitness for a particular purpose.**

- No distributor, dealer, employee, salesperson or representative of Windsor has any authority to change or modify this warranty in any way.
- Windsor is not liable for any consequential, incidental or punitive damages, costs of installation of replacements or costs of refinishing window components or adjacent parts/millwork.
- Windsor shall make the final determination as to whether or not a defect exists.
- In addition to, or in lieu of remedies provided herein, Windsor, at its sole discretion, may repair or replace a defective part or product, or refund a portion of the original purchase price.

- Windsor reserves the right to perform warranty work or arrange for another party to perform warranty work.
- In no event shall the liability of Windsor Windows or any seller of Windsor products arising out of a product defect exceed the original purchase price of the product.
- In the event any provision is found to be unenforceable, the remaining provisions shall remain in full force and effect.
- Any component or product repaired or replaced pursuant to this warranty is warranted for the remainder of the original warranty period.
- Affixed to Windsor's windows are stickers identifying various ratings. These ratings are not performance warranties because window performance will be impacted by conditions and may change over time. These ratings may also apply to single units only, not mulled configurations.
- This is not a warranty of future performance. It is only a warranty to provide the remedies described herein.
- Windsor is not responsible for determining the suitability of its products for particular applications and locations. Nor is Windsor responsible for compliance with building standards, including applicable building codes.
- Windsor makes no warranties whatsoever with respect to accessories or parts not supplied by the manufacturer.
- Windsor may elect to perform repairs in situations where Windsor does not believe any warranty violations exist. This does not constitute a waiver of any of the provisions of this warranty.

### Warranty Claim Procedure

If you have any questions regarding this warranty or have a claim under the provisions of this warranty (your "Claim"), please contact your local authorized independent Windsor distributor or one of our manufacturing facilities listed on the back of this brochure. To process a Claim, you must furnish the glass code (numbers and/or letters printed within/upon the insulated glass unit). If you have questions about locating the glass code, please contact one of the Windsor facilities OR REFER TO THE SUPPORT PAGE ON OUR WEBSITE. You must notify your local independent Windsor distributor or Windsor of any defects within a reasonable time, but no later than 30 days after the defect is discovered or reasonably should have been discovered, and within the period covered by the warranty. Windsor may require any defective parts be returned to Windsor or our closest distributor. In order to process a Claim, Windsor reserves the right to inspect the product before it is removed or modified in any way. Windsor field visits may result in service charges if a non-warranty site survey is required and/or requested.

### Response by Windsor

Windsor will have 30 days to respond to your Claim, with an explanation of what Windsor is willing to do relative to your Claim. Please keep in mind that this response may include an explanation of some action Windsor would like to take, such as conducting further investigation, or it may state that Windsor is not willing to take any action. We point this out to make it clear that Windsor is committing to respond to your Claim, not agreeing to remedy the problems described in every Claim it receives. If you are in any way dissatisfied with Windsor's response to your Claim, you must follow the steps of Windsor's Dispute Resolution Process as outlined below.

### **Dispute Resolution Process**

You and Windsor agree that any Dispute arising out of or related to the Windsor products shall be resolved pursuant to the terms of the Dispute Resolution Process defined in this warranty. The term "Dispute" shall mean any and all claims based on any theory (including, but not limited to, contract, warranty, tort, product liability, strict liability, fraud, consumer protection, subrogation or any other applicable statute, regulation, ordinance or common law) arising out of or related to your Windsor products (including, but not limited to, the design, manufacture, sale, distribution, marketing, warranty, service, use, performance, installation or purchase of your Windsor products) and/or the validity or enforceability of this Warranty and/or the Arbitration Agreement.

### **Notice of Dispute**

The first step in the Dispute Resolution Process is for you and Windsor to attempt to resolve your Dispute informally. To initiate the Dispute Resolution Process, you must provide Windsor with a Notice of Dispute. You can do so either by visiting [www.windsorwindows.com/support](http://www.windsorwindows.com/support), which will take you to a form that you need to complete, or by calling Windsor at 1-800-218-6186.

### **Response by Windsor**

Windsor will have 60 days to respond to your Notice of Dispute by providing a written explanation of what Windsor is willing to do relative to your Dispute.

### **Arbitration Agreement and Jury-Trial and Class-Action Waivers**

If you and Windsor are unable to informally resolve your Dispute to your satisfaction, you may seek to formally resolve your Dispute through arbitration. BY PURCHASING, INSTALLING OR USING THIS PRODUCT WITHOUT OPTING OUT AS PROVIDED BELOW, YOU AGREE TO ARBITRATE ANY DISPUTE YOU MAY HAVE WITH WINDSOR RELATING TO YOUR WINDSOR PRODUCTS AND TO WAIVE YOUR RIGHTS TO A JURY TRIAL AND TO PARTICIPATE IN CLASS-ACTION OR CLASS-ARBITRATION PROCEEDINGS RELATING TO ANY SUCH DISPUTES. The full terms and conditions applicable to this Arbitration Agreement and these waivers are set forth in Windsor's "Arbitration Agreement," which is incorporated herein by reference and is available at [www.windsorwindows.com/support](http://www.windsorwindows.com/support) or by calling Windsor at 1-800-218-6186.

### **Arbitration Opt-Out Option**

YOU CAN OPT OUT OF THE ABOVE ARBITRATION AGREEMENT AND WAIVERS. To do so, you must notify Windsor within 90 calendar days of the date you purchased or otherwise took ownership or other interest in your Windsor products either by visiting [www.windsorwindows.com/support](http://www.windsorwindows.com/support) and completing the Opt-Out Form located there, or by calling Windsor at 1-800-218-6186. Opting out of the Arbitration Agreement will not affect the coverage provided by any warranty applicable to your Windsor products.



## Failure to Follow Procedures or Processes

The failure to follow any of the steps outlined in the Claims Procedures or Dispute Resolution Process sections of this document does not alter, waive or void any of the terms of this document. Opting out, as described above, is the only way to alter, waive or void the Arbitration Agreement and waivers described herein.

## Applicable Law and Severability

This Dispute Resolution Process, including, but not limited to, issues related to its enforceability and effect, will be governed by the laws of the State of Minnesota without regard to conflict of law principles. If any term(s) of this Dispute Resolution Process, Arbitration Agreement and/or waivers is/are found to be invalid or unenforceable in any particular jurisdiction, that term will not apply to that issue in that jurisdiction. Instead, that term will be severed with the remaining terms continuing in full force and effect.

**Effective on Revive pocket replacement windows manufactured after 1/15/2018.**

Notes:

[illegible]